


Detector tube

# Ethylene Oxide $C_2H_4O$ No.163TPM

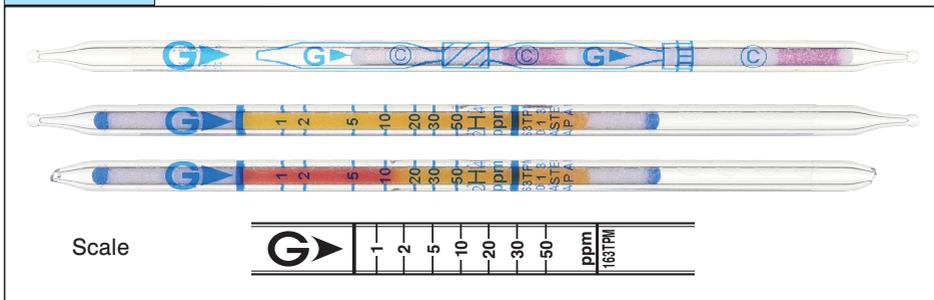


## Performance

When used, these tubes are to be connected. See page 2-3.

|                   |                    |
|-------------------|--------------------|
| Measuring range   | 1 to 50 ppm        |
| Sampling rate     | 50 mL/min (500 mL) |
| Correction factor | 1                  |
| Sampling time     | 10 min             |

|   |   |
|---|---|
| Detecting limit :                           | 0.1 ppm (500 mL)  |
| Colour change :                             | Yellow → Reddish brown  |
| Operating conditions :                      | Temperature 0 to 40 °C (32 to 104 °F) correction used<br>Relative humidity 10 to 90 % correction not used |
| Relative standard deviation :               | 10 % (for 1 to 10 ppm), 5 % (for 10 to 50 ppm)  |
| Tube quantity and number of tests per box : | 10 tubes for 5 tests  |
| Shelf life :                                | 12 months (in the refrigerator)   |

## Reaction principle



## Possible coexisting substances and their interferences

| Substance    | Concentration | Interference | Changes colour by itself to |
|--------------|---------------|--------------|-----------------------------|
| Acetaldehyde | 3.5 ppm       | +            | Reddish brown               |
| Alcohols     | 300 ppm       | -            | No                          |
| Ketones      | 8.5 ppm       | +            | Reddish brown               |
| Formaldehyde | 5.0 ppm       | +            | Reddish brown               |

## Calibration gas generation

Permeation tube method